

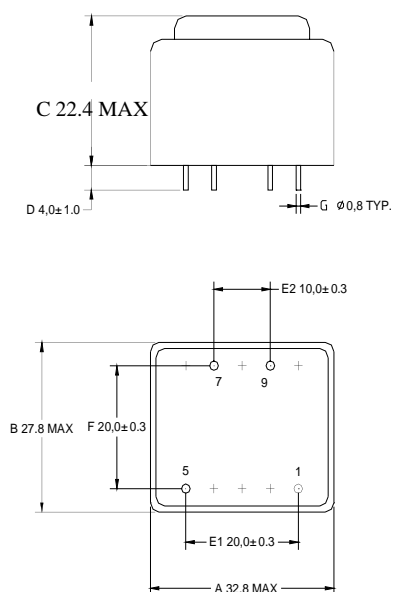



## TR Z01.50/15b II

### OUTLINE DRAWING: UNIT: mm

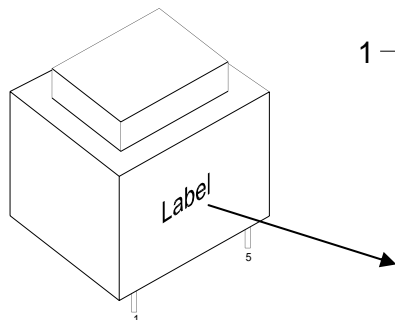

### SCHEMATIC:

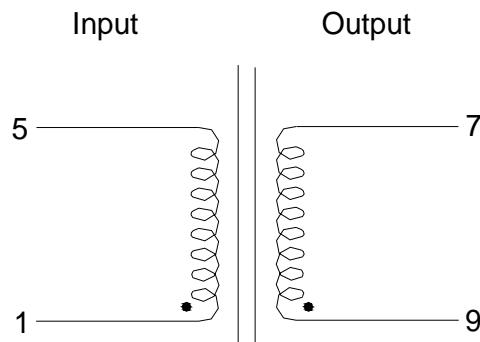

### ELECTRICAL SPECIFICATION:

ITEM	TERMINAL	SPECIFICATION	TEST CONDITION	TEST INSTRUMENTS
EXCITATION CURRENT (mA)	1--5	12 MAX	Input: (1--5) 230V / 50Hz	GDW 4033A
LOSS POWER(W)	1--5	0.9 MAX		
Load Voltage (V)	7--9	15.5 ±10% @ 100mA		
No-Load Voltage(V)	7--9	24.2 Max		
RESISTANCE (Ω)	1--5	3100±10%	Ta=25°C	TH2512B
	7--9	41.5±15%		
INSULATION RESISTANCE	P--S	100MΩ MIN	DC500V /1min	CS5603
HI-POT	P--S	4200V 1mA 1s	50Hz	